

Fiber indoor cable, Plenum MPO Trunk Cable, 48 fiber with 24-fiber, 3.0 mm subunits, Gel-free, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	2
Fibers per Subunit, quantity	24
Total Fiber Count	48

Dimensions

Height Over Jacket	5.8 mm   0.228 in
Width Over Jacket	8.8 mm   0.346 in
Buffer Tube/Subunit Diameter	3 mm   0.118 in

Representative Image

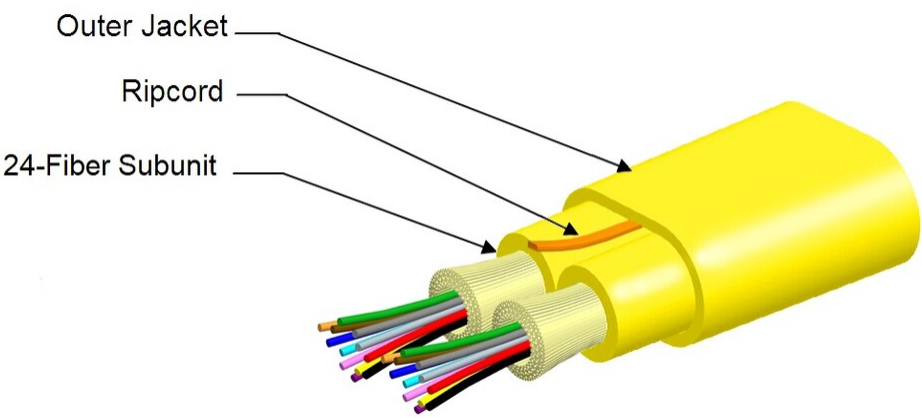

Mechanical Specifications

Minimum Bend Radius, loaded	87 mm   3.425 in
Minimum Bend Radius, unloaded	58 mm   2.283 in
Tensile Load, long term, maximum	200 N   44.962 lbf
Tensile Load, short term, maximum	167 N   37.543 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	2.94 N-m   26.021 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	314 m   1,030.184 ft

Optical Specifications

Fiber Type	G.657.A2   G.657.A2/B2
------------	------------------------

Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
--------------------------	------------------------------------

Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)
Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

Environmental Test Specifications

Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	65 kg/km   43.678 lb/kft
--------------	--------------------------

Included Products

CS-8G1-MP	–	Enhanced Low Macrobending, Zero Water Peak, Dispersion-Unshifted Singlemode Fiber (ITU-T G.657.A2, B2)
-----------	---	--

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable