


Base Product



Ultra Low Loss Singlemode MPO12 Pinned to Unconnectorized 864-Fiber Pre-terminated Trunk Cable, Rollable Ribbon Indoor/Outdoor Central Tube, Low Smoke Zero Halogen/Riser

Product Classification

Regional Availability	Asia   Australia/New Zealand   Europe   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber trunk cable assembly
Product Brand	SYSTIMAX ULL
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration


General Specifications

Color, boot A	Black
Color, connector A	Green
Construction Type	Rollable ribbon
Furcation Color	Yellow
Interface, Connector A	MPO-12/APC Male
Interface, Connector B	Unterminated
Jacket Color	Black
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	12
Total Fibers, quantity	864

Dimensions

Cable Assembly Length Range (m)	3 – 999
Cable Assembly Length Range (ft)	10 – 999

Ordering Tree

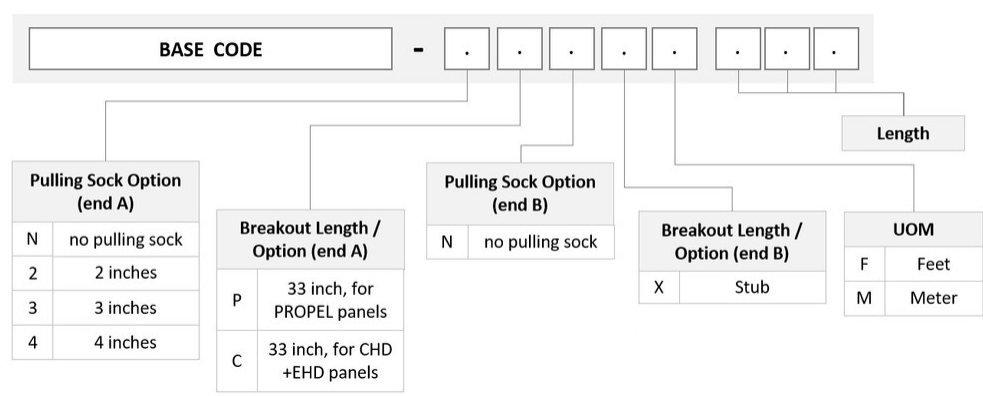

Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

Optical Specifications

Fiber Mode Singlemode  
Fiber Type G.657.A2, TeraSPEED®

Environmental Specifications

Operating Temperature -10 °C to +60 °C (+14 °F to +140 °F)  
Environmental Space Dual Rated LSZH/Riser

Regulatory Compliance/Certifications

Agency	Classification
ANATEL	Compliant
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant




Included Products

760242275 N-864-CN-RR-F12YL/8G1/99G	–	Fiber indoor cable, All-Dielectric, LSZH/Riser-Rated, Gel-Free, Central Tube Rollable Ribbon, 864 fiber, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color, Cca flame rating
--	---	--

# UJGMXUCSX

---

/C  
860638317                      –              MP012, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 3mm



Fiber indoor cable, All-Dielectric, LSZH/Riser-Rated, Gel-Free, Central Tube Rollable Ribbon, 864 fiber, Singlemode G.657.A2, Feet jacket marking, Yellow jacket color, Cca flame rating

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-CN


General Specifications

Cable Type	Ribbon central tube
Construction Type	Non-armored
Subunit Type	Gel-free
Fibers per Ribbon, quantity	12
Jacket Color	Yellow
Jacket Marking	Feet
Total Fiber Count	864

Dimensions

Buffer Tube/Subunit Diameter	14 mm   0.551 in
Diameter Over Jacket	19.5 mm   0.768 in

Representative Image

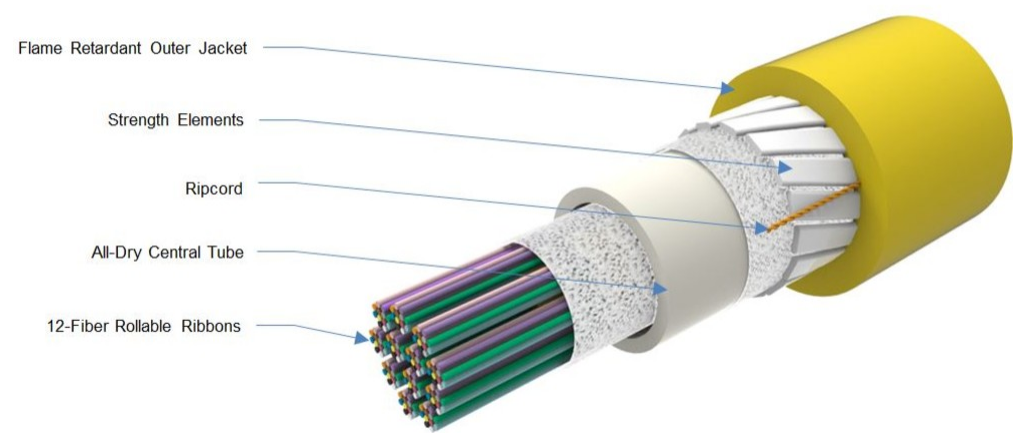

## Mechanical Specifications

Minimum Bend Radius, loaded	390 mm   15.354 in
Minimum Bend Radius, storage coils	783 mm   30.827 in
Minimum Bend Radius, unloaded	153 mm   6.024 in
Tensile Load, long term, maximum	800 N   179.847 lbf
Tensile Load, short term, maximum	2700 N   606.984 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	2.94 N-m   26.021 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7

## Optical Specifications

Fiber Type	G.657.A2   G.657.A2, TeraSPEED®
------------	---------------------------------

## Environmental Specifications

Installation temperature	-20 °C to +60 °C (-4 °F to +140 °F)
--------------------------	-------------------------------------

# 760242275 | N-864-CN-RR-F12YL/8G1/99G/C

<b>Operating Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-104-696   EN 187105   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	Cca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1b
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d0
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)   Riser
<b>Flame Test Listing</b>	NEC OFNR-ST1 (UL) and c(UL)
<b>Flame Test Method</b>	CSA FT4   IEC 60332-1-2   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685
<b>Water Penetration</b>	24 h
<b>Water Penetration Test Method</b>	FOTP-82   IEC 60794-1 F5

## Environmental Test Specifications

<b>Cable Freeze</b>	-2 °C   28.4 °F
<b>Cable Freeze Test Method</b>	FOTP-98   IEC 60794-1 F15
<b>Heat Age</b>	-40 °C to +85 °C (-40 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	-20 °C to +60 °C (-4 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	-20 °C to +70 °C (-4 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	363 kg/km   243.925 lb/kft
---------------------	----------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ANATEL	Compliant
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="https://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant

# 760242275 | N-864-CN-RR-F12YL/8G1/99G/C

---


UK-ROHS

Compliant



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable



MPO12, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 3mm

Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	CommScope®
Product Type	Fiber connector
Product Brand	TeraSPEED®

General Specifications

Color	Green
Color, boot	Black
Ferrule Geometry	Angled
Interface	MPO/APC Male
Interface Feature	Pinned
Total Fiber Count	12

Dimensions

Length	60.1 mm   2.366 in
Compatible Cable Diameter	3 mm   0.118 in

Material Specifications

Ferrule Material	Polymer
------------------	---------

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 °
Mechanical Components Standard	IEC 61754-7

Optical Specifications

Fiber Mode	Singlemode
Fiber Type	G.652.D and G.657.A1, TeraSPEED®   OS2
Insertion Loss Change, mating	0.3 dB



Optical Components Standard	ANSI/TIA-568-C.3
Insertion Loss Change, temperature	0.3 dB
Insertion Loss, maximum	0.35 dB
Return Loss, minimum	65 dB

Packaging and Weights

Packaging quantity	1
--------------------	---

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



\* Footnotes

Insertion Loss Change, mating	TIA-568: Maximum insertion loss change after 500 matings
Insertion Loss Change, temperature	Maximum insertion loss change from -10 °C to +60 °C (+14 °F to +140 °F)