

Indoor/Outdoor Low Smoke Zero Halogen, TeraSPEED® Tight Buffered Office DistributionFiber Fiber Optic Cable, 16 fiber, Singlemode OS1a, black. Provides Rodent Resistance.

- designed to offer flexibility, strength and compact construction for internal and interbuilding use
- non-metallic construction reinforced by E-glass yarns, which provide rodent resistance and higher tensile strength
- oversheathed with a ULSZH jacket meeting IEC fire performance requirements

OBSOLETE

This product was discontinued on: July 6, 2021

Product Classification

Regional Availability	Asia EMEA
Portfolio	CommScope®
Product Type	Fiber indoor/outdoor cable
Product Series	C-DS


General Specifications

Cable Type	Tight buffer
Jacket Color	Black
Jacket Marking	Meters
Strength Members	E-glass yarns
Total Fiber Count	16

Dimensions

Diameter Over Jacket	9 mm 0.354 in
----------------------	-----------------

Representative Image

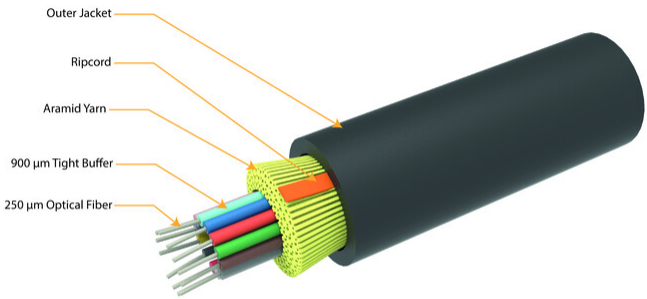

Mechanical Specifications

Minimum Bend Radius, loaded	230 mm 9.055 in
Minimum Bend Radius, unloaded	140 mm 5.512 in
Tensile Load, short term, maximum	2000 N 449.618 lbf
Cable Crush Resistance, maximum	20 N/mm 114.203 lb/in

Optical Specifications

Fiber Type	OS2
------------	-----

Optical Specifications, Wavelength Specific

Standards Compliance	IEC 60794-1 TIA-492CAAB (OS2)
----------------------	---------------------------------

Environmental Specifications

Installation temperature	-5 °C to +50 °C (+23 °F to +122 °F)
Operating Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
Storage Temperature	-20 °C to +60 °C (-4 °F to +140 °F)
EN50575 CPR Cable EuroClass Fire Performance	Cca
EN50575 CPR Cable EuroClass Smoke Rating	s2
EN50575 CPR Cable EuroClass Droplets Rating	d1
EN50575 CPR Cable EuroClass Acidity Rating	a1
Environmental Space	Low Smoke Zero Halogen (LSZH)

Packaging and Weights

Cable weight

90 kg/km | 60.477 lb/kft

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable