

# RRV4-65B-R6H4-V3



12-port sector antenna, 4x 694–960 and 8x 1695–2690 MHz, 65° HPBW, 6x RET

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

## General Specifications

Antenna Type	Sector
Band	Multiband
Color	Light Gray (RAL 7035)
Grounding Type	RF connector inner conductor and body grounded to reflector and mounting bracket
Performance Note	Outdoor usage
Radome Material	Fiberglass, UV resistant
Reflector Material	Aluminum
RF Connector Interface	4.3-10 Female
RF Connector Location	Bottom
RF Connector Quantity, high band	0
RF Connector Quantity, mid band	8
RF Connector Quantity, low band	4
RF Connector Quantity, total	12

## Remote Electrical Tilt (RET) Information


RET Hardware	CommRET v2
RET Interface	8-pin DIN Female   8-pin DIN Male
RET Interface, quantity	1 female   1 male
Input Voltage	10–30 Vdc
Internal RET	High band (4)   Low band (2)
Power Consumption, active state, maximum	8 W
Power Consumption, idle state, maximum	1 W
Protocol	3GPP/AISG 2.0 (Single RET)

## Dimensions

# RRV4-65B-R6H4-V3

Width	498 mm   19.606 in
Depth	197 mm   7.756 in
Length	2000 mm   78.74 in
Net Weight, antenna only	32.4 kg   71.43 lb

## Array Layout

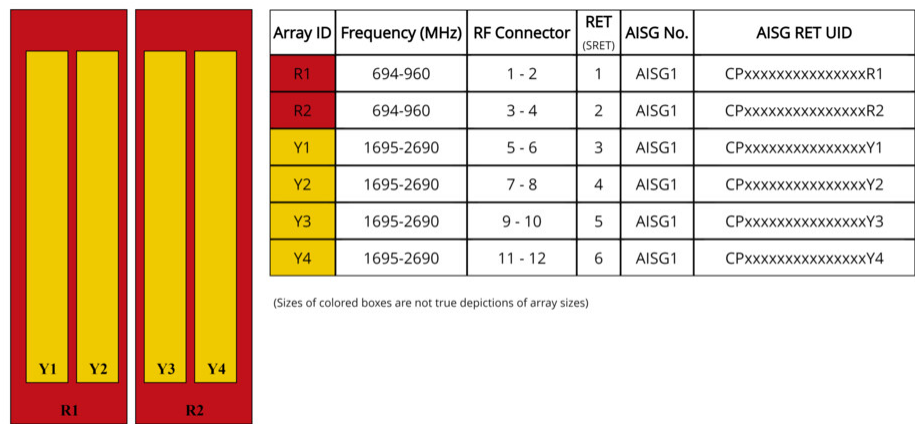

## Port Configuration



## Electrical Specifications

Impedance	50 ohm
Operating Frequency Band	1695 – 2690 MHz   694 – 960 MHz
Polarization	±45°
Total Input Power, maximum	900 W @ 50 °C

# RRV4-65B-R6H4-V3

## Electrical Specifications

	R1,R2	R1,R2	R1,R2	Y1-Y4	Y1-Y4	Y1-Y4	Y1-Y4
Frequency Band, MHz	694–790	790–890	880–960	1695–1920	1920–2180	2300–2500	2500–2690
RF Port	1-4	1-4	1-4	5-12	5-12	5-12	5-12
Gain at Mid Tilt, dBi	14.9	15.3	15.4	17.1	18.1	18.6	18.7
Beamwidth, Horizontal, degrees	70	65	65	70	63	57	56
Beamwidth, Vertical, degrees	10.7	9.4	8.8	6.3	5.7	5	4.8
Beam Tilt, degrees	2–14	2–14	2–14	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	15	15	17	18	22	21
Front-to-Back Ratio at 180°, dB	31	31	32	34	32	32	32
Isolation, Cross Polarization, dB	27	27	27	27	27	27	27
Isolation, Inter-band, dB	26	26	26	26	26	26	26
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-153	-153	-153	-153	-153	-153	-153
Input Power per Port at 50°C, maximum, watts	300	300	300	250	250	250	250

## Mechanical Specifications

Effective Projective Area (EPA), frontal	0.65 m²   6.997 ft²
Effective Projective Area (EPA), lateral	0.2 m²   2.153 ft²
Wind Loading @ Velocity, frontal	688.0 N @ 150 km/h (154.7 lbf @ 150 km/h)
Wind Loading @ Velocity, lateral	210.0 N @ 150 km/h (47.2 lbf @ 150 km/h)
Wind Loading @ Velocity, maximum	826.0 N @ 150 km/h (185.7 lbf @ 150 km/h)
Wind Loading @ Velocity, rear	474.0 N @ 150 km/h (106.6 lbf @ 150 km/h)
Wind Speed, maximum	241 km/h (150 mph)

## Packaging and Weights

Width, packed	565 mm   22.244 in
Depth, packed	318 mm   12.52 in
Length, packed	2121 mm   83.504 in
Weight, gross	44.5 kg   98.106 lb

## Regulatory Compliance/Certifications

# RRV4-65B-R6H4-V3

---

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

BSAMNT-3	–	Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.
----------	---	--

## \* Footnotes

Performance Note	Severe environmental conditions may degrade optimum performance
------------------	---