ULVQVLUT8

Base Product



Ultra Low Loss ULL OM5 MPO8 APC non-pinned to LC/UPC Uniboot Ruggedized fanout Cable, 8-Fiber, Plenum, 8 fiber PmP 2.0 mm

Product Classification

Regional Availability	Asia Australia/New Zealand China Europe India Latin America Middle East/Africa North America	
Portfolio	CommScope®	
Product Type	Ruggedized fanout	
Product Brand	Propel SYSTIMAX ULL	
Ordering Note	For additional jacket colors, please contact a CommScope Sales Representative For lengths greater than 999 ft (304 m), orders must be in meters Minimum length may vary based on cable configuration	

General Specifications

Connector A, quantity	1
Color, boot A	Gray
Color, connector A	Lime green
Connector B, quantity	8
Color, boot B	Lime green
Color, connector B	Black
Construction Type	Stranded
Furcation Color	Lime green
Interface, Connector A	MPO-08/APC Female
Interface, Connector B	LC/UPC
Interface Feature, connector B	Uniboot
Jacket Color	Lime green
Polarity	Method B Enhanced (ULL)
Fibers per Subunit, quantity	8
Total Fibers, quantity	8

Page 1 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 12, 2024




ULVQVLUT8

Dimensions

Breakout Length	22 in
Cable Assembly Length Range (m)	3 - 305
Cable Assembly Length Range (ft)	10 - 999

Ordering Tree

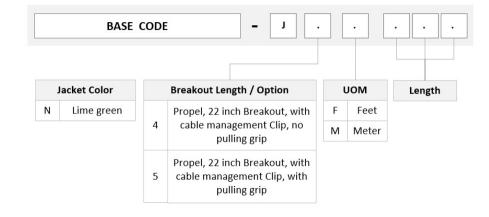

Mechanical Specifications

Cable Retention Strength, maximum	11.24 lb @ 0 ° 4.40 lb @ 90 °	
Optical Specifications		
Fiber Mode	Multimode	
Fiber Type	OM5, LazrSPEED®	

Environmental Specifications

Operating Temperature	-10 °C to +60 °C (+14 °F to +140 °F)
Environmental Space	Indoor Plenum

Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on www.commscope.com/ProductCompliance
ROHS	Compliant/Exempted

Page 2 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 12, 2024



ULVQVLUT8

UK-ROHS

Compliant/Exempted

Included Products

760248188 P-008-MP-5G-F08LM/20T	-	Fiber indoor cable, LazrSPEED® Plenum for MPO Trunks, 8 fiber, Multimode OM5, Feet jacket marking, Aqua jacket color
860658162	-	2.0 mm LC Uniboot GEN 1.5, Lime Green
860662232	-	MPO8,ULL,Multimode,FEMALE,APC,GREEN,2 mm

Page 3 of 3

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: April 12, 2024

