

Fiber indoor cable, LazrSPEED® Plenum MPO Trunk Cable, 96 fiber with 24-fiber, 3.0mm subunits, Gel-free, Multimode OM5, Feet jacket marking, Lime green jacket color

Product Classification

Regional Availability	Asia   Australia/New Zealand   Latin America   Middle East /Africa   North America
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	P-MP


General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Jacket Color	Lime green
Jacket Marking	Feet
Subunit, quantity	4
Fibers per Subunit, quantity	24
Total Fiber Count	96

Dimensions

Buffer Tube/Subunit Diameter	3 mm   0.118 in
Diameter Over Jacket	9.4 mm   0.37 in

Representative Image

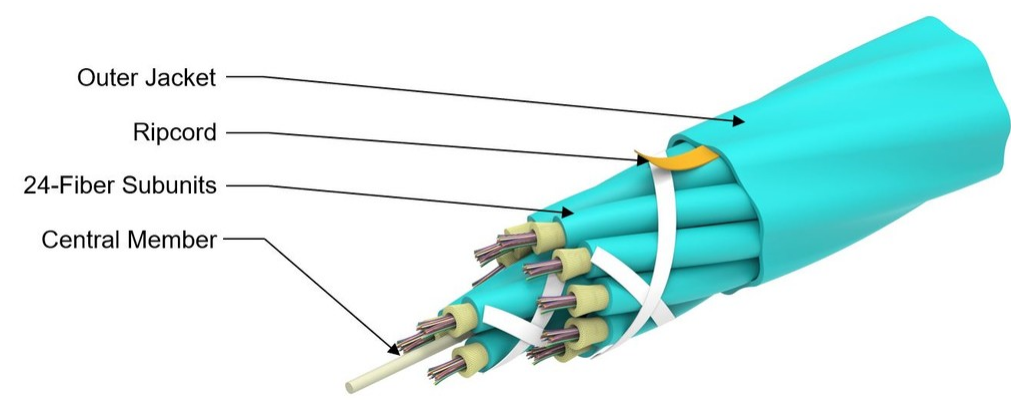

## Mechanical Specifications

Minimum Bend Radius, loaded	141 mm   5.551 in
Minimum Bend Radius, unloaded	94 mm   3.701 in
Tensile Load, long term, maximum	400 N   89.924 lbf
Tensile Load, short term, maximum	1335 N   300.12 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	25 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	2.94 N-m   26.021 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads
Strain Test Method	FOTP-33   IEC 60794-1 E1
Twist	10 cycles
Twist Test Method	FOTP-85   IEC 60794-1 E7
Vertical Rise, maximum	464 m   1,522.31 ft

## Optical Specifications

Fiber Type	OM5, LazrSPEED® wideband
------------	--------------------------

## Environmental Specifications

Installation temperature	0 °C to +70 °C (+32 °F to +158 °F)
Operating Temperature	0 °C to +70 °C (+32 °F to +158 °F)

Storage Temperature	-40 °C to +70 °C (-40 °F to +158 °F)
Cable Qualification Standards	ANSI/ICEA S-83-596   Telcordia GR-409
Environmental Space	Plenum
Flame Test Listing	NEC OFNP (ETL) and c(ETL)
Flame Test Method	NFPA 130   NFPA 262

Environmental Test Specifications

Low High Bend	0 °C to +70 °C (+32 °F to +158 °F)
Low High Bend Test Method	FOTP-37   IEC 60794-1 E11
Temperature Cycle	0 °C to +70 °C (+32 °F to +158 °F)
Temperature Cycle Test Method	FOTP-3   IEC 60794-1 F1

Packaging and Weights

Cable weight	88 kg/km   59.133 lb/kft
--------------	--------------------------

Included Products

- CS-5G-MP
- LazrSPEED® OM5 WideBand Multimode Fiber

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable