

# PPLUJG8LCQXM



Propel ULL Singlemode Cabled Module, 18x8 duplex LC Propel module on End A to 1x8f MPO/UPC pinned on End B, 144 fiber LSZH Trunk, Method B Enhanced

- This component requires 36 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA   Latin America   North America
Portfolio	SYSTIMAX®
Product Type	Fiber cabled module
Product Brand	Propel
Product Series	PPL
Ordering Note	For lengths greater than 999 ft (304 m), orders must be in meters   Maximum length is 400 meters

## General Specifications

Configuration Type	PROPEL Module to MPO Connector
Cable Color	Yellow
Cable Type	Trunk Cable - LSZH
Interface, front	LC/UPC
Interface Feature, front	Duplex   Shuttered
Interface Color, front	Blue
Interface, rear	MPO-08/UPC Male
Interface Feature, rear	Key up/up   Pinned
Module Size, end A	8 fiber
Module Size, end B	8 fiber
Module Quantity, end A	18
Module Quantity, end B	18
Polarity	Method B Enhanced (ULL)
Total Fibers, quantity	144

# PPLUJG8LCQXM

Total Ports, quantity, front	72
Dimensions	
Height	11 mm   0.433 in
Width	65 mm   2.559 in
Depth	170 mm   6.693 in
Breakout Length, end B	12 in   120 in   33 in   36 in   48 in   60 in   72 in
Cable Assembly Length Range (m)	1 – 400
Cable Assembly Length Range (ft)	2 – 999

## Ordering Tree



## Optical Specifications

Fiber Mode	Singlemode
Fiber Type	OS2
Insertion Loss, maximum	0.6 dB

## Environmental Specifications

Qualification Standards	IEC 61753-1   TIA-568.3-D
Safety Standard	c-UL-us

## Packaging and Weights

Packaging quantity 1


Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



Included Products

760253753 N-144-MP-8G1-F08YL/20T/B2	–	Fiber indoor cable, Low Smoke Zero Halogen Riser MPO Trunk, 144 fiber with 2.0 mm Subunits, Singlemode G.657.A2/B2, Feet jacket marking, Yellow jacket color, B2ca flame rating
--	---	---

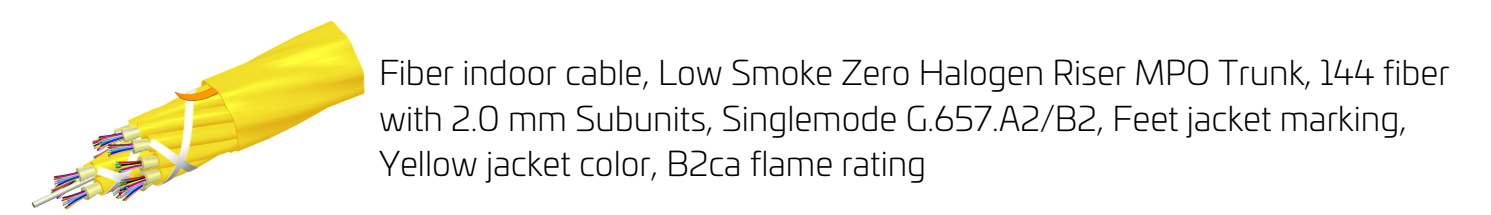

## Product Classification

Regional Availability	Asia   Australia/New Zealand   EMEA
Portfolio	CommScope®
Product Type	Fiber indoor cable
Product Series	N-MP

## General Specifications

Cable Type	MPO trunk cable
Construction Type	Non-armored
Subunit Type	Gel-free
Filler, quantity	0
Jacket Color	Yellow
Jacket Marking	Feet
Subunit, quantity	18
Fibers per Subunit, quantity	8
Total Fiber Count	144

## Dimensions

Buffer Tube/Subunit Diameter	2 mm   0.079 in
Diameter Over Jacket	13 mm   0.512 in

## Mechanical Specifications

Minimum Bend Radius, loaded	195 mm   7.677 in
Minimum Bend Radius, unloaded	130 mm   5.118 in
Tensile Load, long term, maximum	200 N   44.962 lbf
Tensile Load, short term, maximum	667 N   149.948 lbf
Compression	10 N/mm   57.101 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3

# 760253753 | N-144-MP-8G1-F08YL/20T/B2

---

<b>Flex</b>	25 cycles
<b>Flex Test Method</b>	FOTP-104   IEC 60794-1 E6
<b>Impact</b>	2.94 N-m   26.021 in lb
<b>Impact Test Method</b>	FOTP-25   IEC 60794-1 E4
<b>Strain</b>	See long and short term tensile loads
<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	131 m   429.79 ft

## Optical Specifications

<b>Fiber Type</b>	G.657.A2/B2
-------------------	-------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +50 °C (+32 °F to +122 °F)
<b>Operating Temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/ICEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass Fire Performance</b>	B2ca
<b>EN50575 CPR Cable EuroClass Smoke Rating</b>	s1a
<b>EN50575 CPR Cable EuroClass Droplets Rating</b>	d1
<b>EN50575 CPR Cable EuroClass Acidity Rating</b>	a1
<b>Environmental Space</b>	Dual Rated LSZH/Riser   Low Smoke Zero Halogen (LSZH)   Riser
<b>Flame Test Listing</b>	NEC OFNR-ST1 (ETL) and c(ETL)
<b>Flame Test Method</b>	CSA FT4   IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685

## Environmental Test Specifications

<b>Low High Bend</b>	0 °C to +50 °C (+32 °F to +122 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

# 760253753 | N-144-MP-8G1-F08YL/20T/B2

---

**Cable weight** 155.9 kg/km | 104.76 lb/kft

\* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable